


STAY PROTECTED
STAY CONNECTED

Protection without compromise.
Compatible with full-size hearing protectors with integrated music and communication.


TECHNICAL SPECIFICATIONS

Optical clarity / Filtering performance	1/1/1/1 per EN 379 / W
Switching time	0.1 ms
Angular dependence class	V1
Lowest dark state	8
Highest dark state	12
UV/IR protection	At all times
Operating temperature	-5°C - +55°C (23°F - 131°F)
Window size	100 x 54 mm (3.94 x 2.13 in)
Weight	515 g (18.17 oz)
Standards	EN ISO16321-1:2022, EN ISO 16321-2:2021
Warranty	2 years

REPLACEMENT PARTS

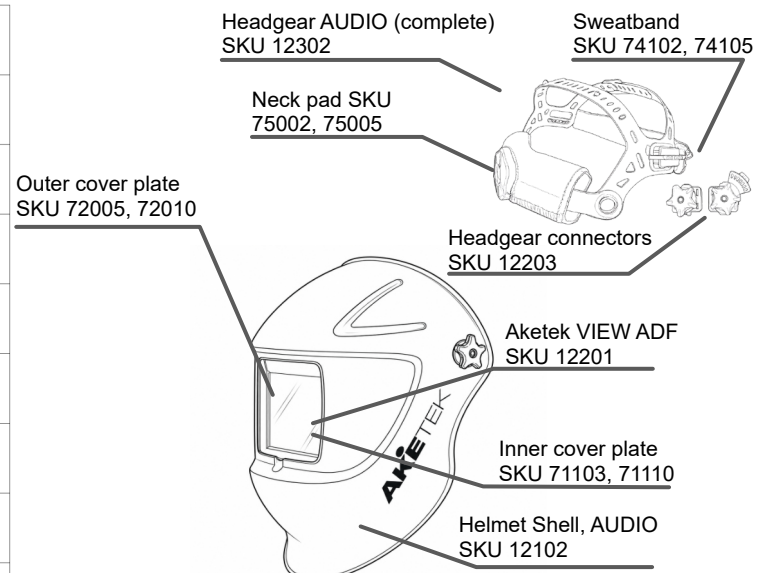

Accessories

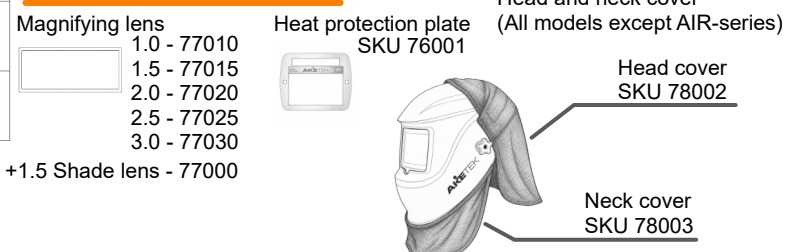

Scan for more information.